

T +44 (0) 1942 671122 E sales@plusopto.co.uk
W www.plusopto.co.uk
B13 Derwent Court William Way Moss Industrial Estate Leigh Lancashire WN7 3PT

FUT Series RF LED Controller Selector Guide

The Mi-Light, Mi-Boxer series RF LED controllers comprises of 5 types, compatible with hand-held remotes and wall mount Touch Panel controllers. Utilising advanced RF 2.4GHz wireless with high output signal to achieve long transmission distances and reduce interference by obstacles.

FUT-036 LED Wireless Receiver/Driver Dimming

Wireless RF 2.4GHz Receiver Driver Low Voltage 12-24VDC Single channel Dimming 1-Channel 12A/channel Signal auto-transmitting Auto sync between controllers Transmission distance up to 30 metres Compatible with hand-held remotes and wall touch panel controllers

FUT-035 LED Wireless Receiver/Driver CT Control

Wireless RF 2.4GHz Receiver Driver Low Voltage 12-24VDC CT (Colour Temperature) 2-Channel 6A/channel Signal auto-transmitting Auto sync between controllers Transmission distance up to 30 metres Compatible with hand-held remotes and wall touch panel controllers

FUT-043 LED Wireless Receiver/Driver RGB

Wireless RF 2.4GHz Receiver Driver Low Voltage 12-24VDC RGB 3-Channel 6A/channel Signal auto-transmitting Auto sync between controllers Transmission distance up to 30 metres Compatible with hand-held remotes and wall touch panel controllers

FUT-044 LED Wireless Receiver/Driver RGBW

Wireless RF 2.4GHz Receiver Driver Low Voltage 12-24VDC RGBW 4-Channel 6A/channel Signal auto-transmitting Auto sync between controllers Transmission distance up to 30 metres Compatible with hand-held remotes and wall touch panel controllers

FUT-045 LED Wireless Receiver/Driver RGB+CT

Wireless RF 2.4GHz Receiver Driver Low Voltage 12-24VDC RGB+CT 5-Channel 6A/channel Signal auto-transmitting Auto sync between controllers Transmission distance up to 30 metres Compatible with hand-held remotes and wall touch panel controllers














T +44 (0) 1942 671122 E sales@plusopto.co.uk
 W www.plusopto.co.uk
 B13 Derwent Court William Way Moss Industrial Estate Leigh Lancashire WN7 3PT

Compatible with Hand-held LED controllers and Touch Panel Wall plates

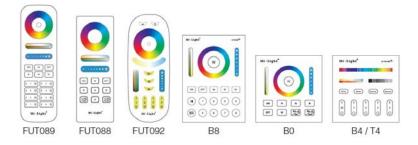



WL-BOX1 Gateway RF to WiFi

Compatible with Mi-Light RF 2.4GHz FUT series RF LED controllers Input: DC5V/500mA (Micro USB) Communication Mode: WiFi-IEEE 802.11b/g/n Transmitting power: 6dBm

Supports 3rd party Apps

Voice control from 3rd party voice control and smartphone Apps



We offer an extensive range of LED driver power supplies compatible with the FUT series.

For a wide range of LED strip products please visit our web site at www.plusopto.co.uk/flexistrip.html

