


LT-834

DALI/DMX - Phase-cut Dimming Module

LTECH

**DMX/RDM
DALI, PUSH**

100~240Vac 5A

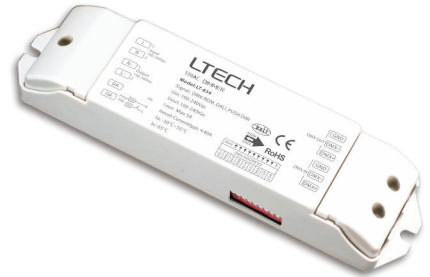

- Dimming interface: DALI, DMX/RDM, Push DIM.
- Leading edge phase-cut dimming output.
- Max. current loaded: 5A. Bulb or triac dimming driver can be connected
- Over load protection, recover automatically.
- Full protective plastic housing.
- DALI bus standard: IEC62386-101, 102, 207.
- Suitable for indoor environments.


CE RoHS  

Main Characteristics


Dimming Interface:	DALI, DMX/RDM, PUSH	Over Load Protection:	Shut down the output when current load $\geq 102\%$, auto recovers.
Input Voltage:	100~240Vac, 50~60Hz	Working Temp.:	-30°C~55°C
Dimming Mode:	Leading edge (triac)	Dimensions:	L175xW44xH30(mm)
Output:	Max. 5A	Package Size:	L178xW48xH33(mm)
Load Power:	Incandescent lamp: 25-500W High-voltage halogen lamp: 25-500W Dimming LEDs: 6-300W	Weight [G.W.]:	140g

Dimensions

Unit : mm

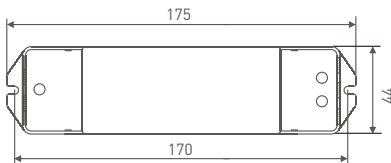

Wiring Diagram

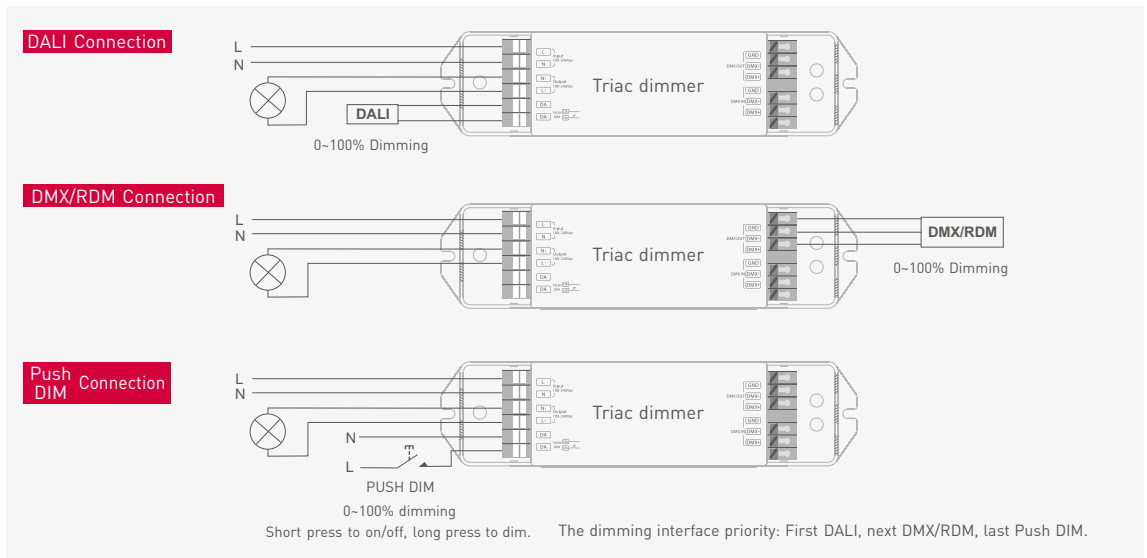


RDM Mode: The dip switch 1-9 are OFF .



DMX Address Setting :

E.g.1: Set Initial Address To 32.



E.g.2: Set Initial Address To 37.



DMX address value = the total value of [1-9], to get the place value when in "on" position,